



# AKR 300

CONVENIENT & EASY-TO-USE  
OBJECTIVE REFRACTION



# AKR 300

## A SMART AND CONVENIENT REFRACTION SOLUTION FOR YOUR PRACTICE

## SPECIFICATIONS

### EASY & FAST MEASUREMENTS




- Integrated periphery keratometry measurement for contact lens fitting.
- Cornea, pupil & hard contact lens diameter easy measurement.
- Measurement Protocol Customization.

### INTUITIVE USAGE



- Instant access & display of last 10 measurements stored in memory.
- Assistant measurement function.
- Unique Technology: «Live mode» to assist ECP's measurement.

### COMPACT & ERGONOMIC

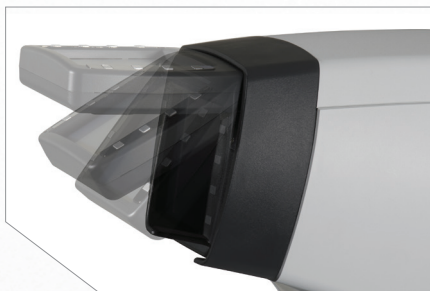

- 5,7" TFT LCD color touchscreen with 90° tilt capability.
- Motorized chin rest for convenient patient positioning.
- Easy access to settings and measurement modes.

### MEASUREMENT MODES

**K/R Mode:** Continuous Keratometry & Refractometry

**REF Mode:** Refractometry

**KER Mode:** Keratometry

**CLBC Mode:** Contact Lens Base Curve Measurement

**K(P) Mode:** Peripheral Keratometry

### REFRACTION MEASUREMENT

Sphere -25.00D ~ +22.00D (0.12D and 0.25D)

Cylinder -0.00D ~ ±10.00 (0.12D / 0.25D)

Axis 0° ~ 180° (1°)

VD (Vertex Distance) 0.0, 12.0, 13.5, 15.0

PD measurement: 10 - 88 mm (1 mm)

Minimum measurable pupil diameter  $\varnothing$  3 mm

### KERATOMETRY MEASUREMENT

Corneal curvature radius 5.00 to 10.20 mm (0.01 mm)

Corneal refraction 67.5D to 33.00D (0.05D / 0.12D / 0.25D)

Corneal astigmatism 0D to ± 15D (0.05D / 0.12D / 0.25D)

Astigmatism axis 0° to 180° (1°)

### OTHERS

Corneal diameter 2.00 ~ 14.00 mm (0.01 mm)

Data memory: 10 measured value for each eye

Screen 5,7", Color TFT LCD (touch screen)

Dimensions and weight 260(W) x 500(D) x 450(H) mm - 20 kg

Integrated printer with auto-cutter function

External output terminal: USB (import), RS 232C (export)

Power-supply 100-240 V AC, 50-60 Hz

As improvements are made, these specifications and pictures are not contractually binding and may be changed without prior notice.



#### ESSILOR INSTRUMENTS

81 boulevard Jean-Baptiste Oudry  
94000 Créteil  
France  
Tél. 33(0)1 49 80 62 80  
www.essilor-instruments.com

